



```
int variable = 5;
int *zeiger = &variable;
printf("%p\n", zeiger);
printf("%d\n", *zeiger);
printf("%p\n", &zeiger);
```

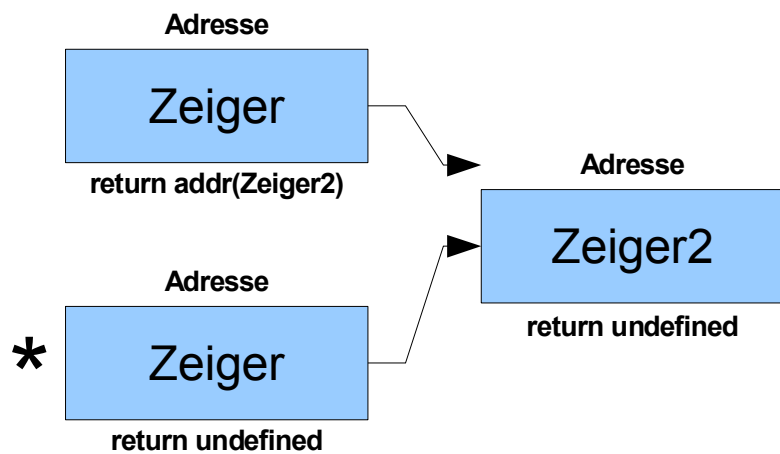

```
int *zeiger2;
int **zeiger = &zeiger2;
printf("%p\n", &zeiger2);
printf("%p\n", &zeiger);
printf("%d\n", zeiger2);
printf("%p\n", zeiger);
printf("%d\n", *zeiger);
```

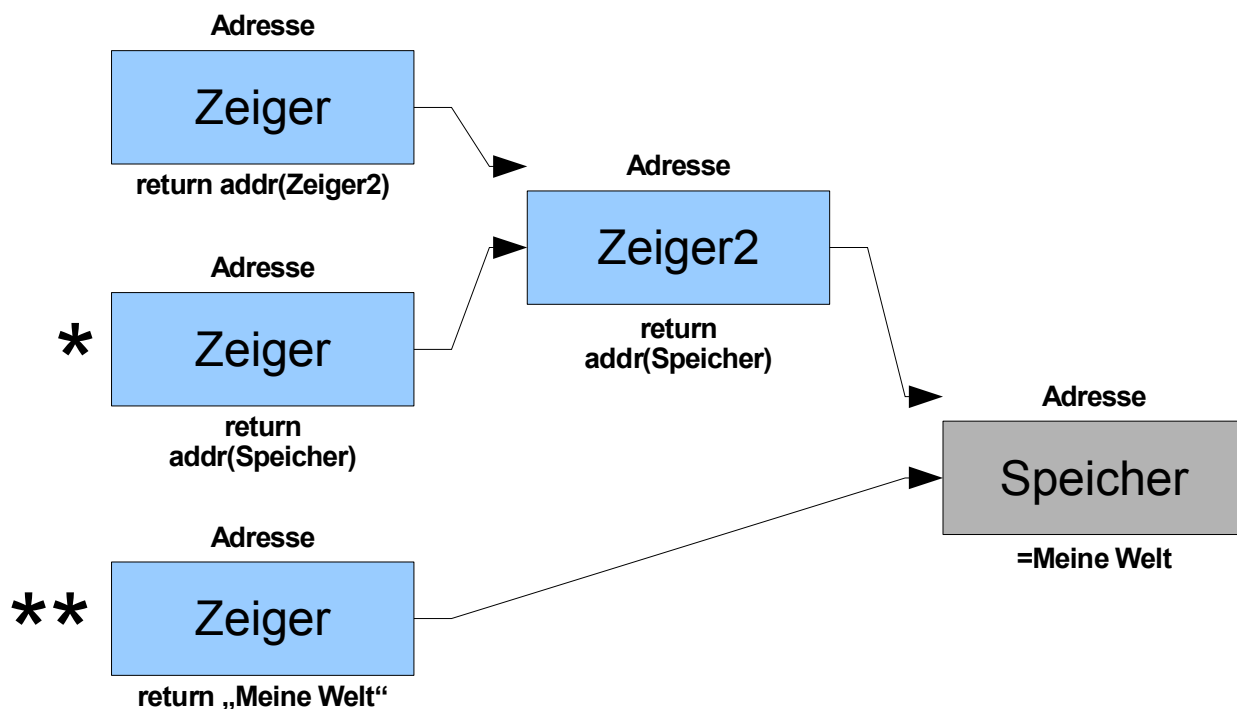

```
char *zeiger2 = "Meine Welt";
char **zeiger = &zeiger2;
printf("%p\n", zeiger);
printf("%p\n", zeiger2);
printf("%p\n", *zeiger);
printf("%c\n", **zeiger);
printf("%s\n", *zeiger);
```